

Eco-Friendly & Professional LED WIDESCREEN ULTRA HD DISPLAY 84WS70BS




ULTRA HD (ULTRA HIGH DEFINITION) - HIGH PICTURE QUALITY

By realizing the LED display with the large screen size, Ultra High Definition becomes possible to offer high realistic sensation and immersiveness.




84" EDGE LED LARGE SCREEN

Providing immersive wide viewing with high quality. The sheer size of the display, which is equal to four 42-inch displays, will give you a breathtaking viewing experience.

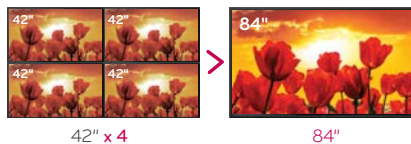

HYBRID TYPE MEDIA PLAYER BUILT-IN READY

Making your signage look even slimmer and helps you maintain the system far more conveniently.

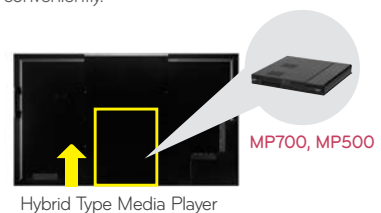

LED WIDESCREEN ULTRA HD DISPLAY

84WS70BS 84U"



FEATURES

- 84" Edge LED Large Screen
- Super High Resolution : 3,840 x 2,160 (Ultra HD)
- Clear & Vivid Picture (Dynamic CR : 500,000 : 1)
- Auto Brightness Sensor
- Smart Energy Saving
- Hybrid Type Media Player Built-in Ready (MP700, MP500)
- Landscape Only

SPECIFICATIONS

84WS70BS

PANEL	Screen Size	84U"
	Panel Technology	IPS
	Aspect Ratio	16 : 9
	Native Resolution	3,840 x 2,160 (Ultra HD)
	Brightness	350nit
	Contrast Ratio	1,400 : 1
	Dynamic CR	500,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	12ms (G to G) typ.
CONNECTIVITY	Input	
	Digital	HDMI(2), DVI-D(1), Display Port(1) with HDCP for all input
	Analog	Composite(1), RGB(1)
	Audio	RGB, DVI-D, AV
	External Control	RS232C(1), RJ45(1), IR(1, Internal)
	USB	USB 2.0(2)
	Output	
	Digital	DVI-D(1)
	Analog	RGB(1)
	Audio	Yes(1), Line out(1)
	External Control	RS232C(1), IR(1, Internal)
	Audio	
	Auto Volume	No
	Balance	Yes
	Audio Power	20W (10W x 2)
	Speaker On/off	Yes
	Clear Voice II	Yes
	Sound mode	Standard, Music, Cinema, Sports, Game, Vivid, User Setting

PHYSICAL SPECIFICATION	Bezel Width	27.9mm
	Monitor Dimension (W x H x D)	192.3cm x 110.9cm x 5.1cm (Including Handle : 101cm)
	Weight (head)	72.8Kg
	Carton Dimensions (W x H x D)	203.4cm x 121.3cm x 31.4cm
	Packed Weight	87.1Kg
	VESA™ Standard Mount Interface	600mm x 400mm
SPECIAL FEATURES	Additional	Smart Energy Saving, Temp Sensor, Auto Brightness Sensor, ISM Method, Key Lock
ENVIRONMENT CONDITIONS	Operation Temperature	0°C ~ 40°C
	Operation Humidity	10% ~ 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Consumption	
	Typical / Smart Energy Saving	350W(Typ) / 200W(SES)
	DPMS	1.5W
	Power Off	0.5W
STANDARD(CERTIFICATION)	Safety	UL, cUL, CB scheme, TUV
	EMC	FCC Class 'A', VCCI, C-tick, CE, KCC
	ErP / Energy Star	Yes / No
MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (optional)	Yes (MP700, MP500)
	External Media Player Attachable	No
SOFTWARE COMPATIBILITY	Supersign Compatibility	Elite-C
ACCESSORY	Included	D-Sub Cable, Power Cord, Remote Controller (include battery 2ea), CD (Manual/Elite-C/ESG), Eye Ball(2EA)
	Optional	MP700, MP500, SP-2000, LSW630

※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

DIMENSION (unit : mm)

